

Cummins Generator

Prime: 64KW/80KVA
Standby: 70KW/88KVA



GENERATOR POWER SOLUTIONS

Increased availability for new operations

Reliable, robust and versatile generator.
Ready to deliver power for a next job.

Increased uptime during operations

Once installed on the end-user-site, the generator will be ready to run: “peace of mind” operation.

Reduced transport and installation costs

The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs

Longer service intervals.
Quicker and more efficient service jobs.

Premium resale value

Designed and built to last.

**SAFETY**

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

Technical Data

Model		AJ- 88C
Prime power	kva	80
	kw	64
Standby power	kva	88
	kw	70
Rated voltage line to line	V	230/400
Rated current	A	115,2
Maximun sound level	dB@7m	72

Engine	Cummins
--------	---------

Model		4BTA3.9-G11
Aspiration		Four-stroke,water-cooled,in-line,direct injection,turbocharged,after cooled
Fuel system		BYC PB electric governor
No. cylinders		4
Displacement	L	3,9
Bore*Stroke	mm	102x120
Compression ratio		17.3:1
Rated speed	r/min	1500
Governor		Electric system
Engine wet weight	kg	350
Engine idel speed		950-1050
Fire order		1-3-4-2
Start Motor	V	24

Exhaust System

Max exhaust back pressure	kPa	10
---------------------------	-----	----

Air intake System

Max inlet pressure (Dirty air)	kPa	6,2
Max inlet pressure (Clean air)	kPa	3,7

Fuel System

110% load(Standby power)	L/h	20
100% load(Prime power)	L/h	17,6
75% load(Prime power)	L/h	13,2
50% load(Prime power)	L/h	9,1
25% load(Prime power)	L/h	5,3

Lubrication System

Idle speed oil pressure	kPa	207
Governed speed oil pressure	kPa	345
Max Oil temp	℃	121
Oil capacity	L	10,9

Cooling System

Coolant capacity--Engine only	L	8,3
Max coolant friction head to engine	Kpa	35
Max water temp standby/prime powe	℃	104/100

Standard Features

Engine(Cummins ENGINE)	●
Radiator 50°C max,fans are driven by belt	●
24V charge alternator	●
Alternator: single bearing alternator IP23	●
insulation class H/H	●
Standard auto control system	●
One set of air filter, fuel filter, oil filter	●
Main line circuit breaker / ACB	●
Base fuel tank	●
Two 24V batteries, rac and cable	●
Exhaust system(Ripple flex exhaust pipe)	●
Exhaust siphon, flange, muffler	●
User manual	●
Battery charge	●

Options

Water heater	☐
Alternator heater	☐
PMG	☐
Water oil separator	☐
Daily fuel tank	☐
Remote control panel	☐
Automatic transfer switch/ATS	☐
Switch box	☐

Standard: ●

Options:○

Alternator

Model		TAL-A44-C/68KW
Alternator Brand		Leroy Somer
Phase		3
Voltage	V	230/400
Wiring Type		12 wires
Bearing		1
Power factor		0,8
Frequency	Hz	50
Prime power	KVA	85
Exciter Type		Brushless, self-excitation
Voltage regulation	%	±0.5

Protection Grade
Insulation grade

IP 23
H

ControllerDeepsea

ModelDSE 6120

Built-in governor and AVR control

Base load (kW export) functionality

Mains (utility) de-coupling protection

Generator power (kW, kVA) monitoring

Overload (kW & kV Ar) protection


Emergency stop

Start failure

Etc...




Unit Dimensions(Basic unit)

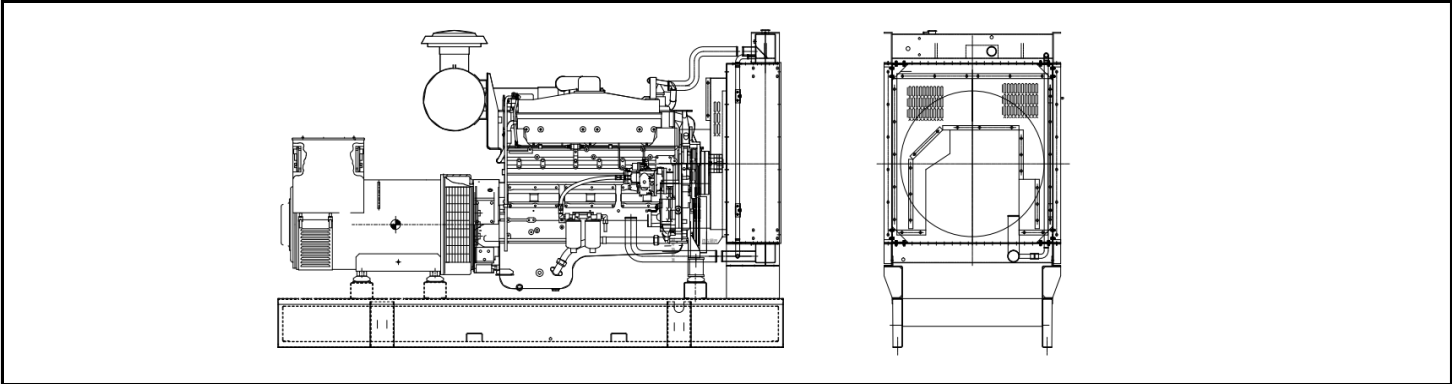

Open Type

L*W*H	mm	1900*850*1300
Weight	kg	1020

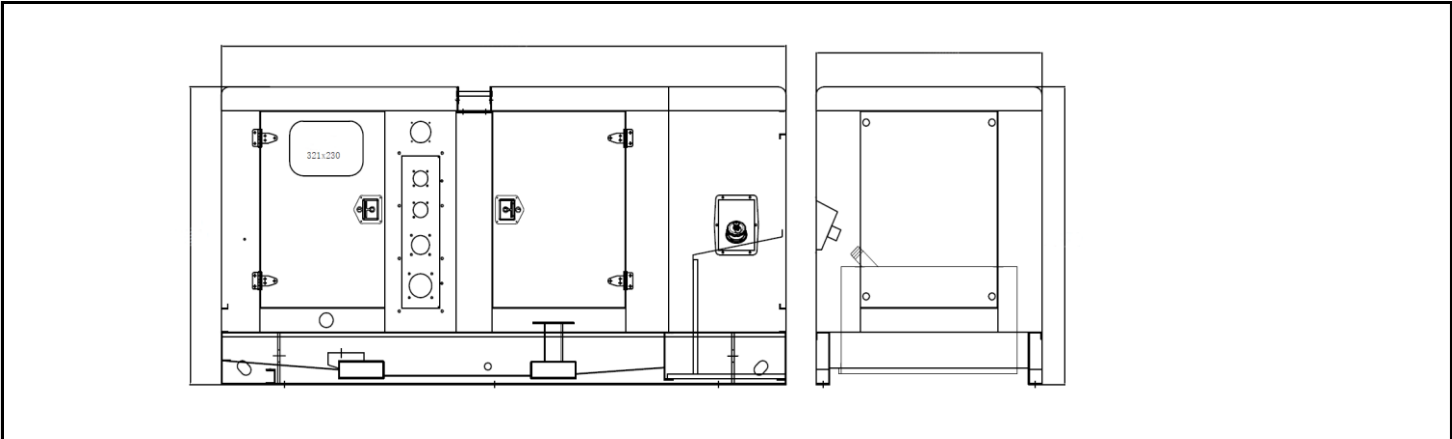

Silent Type

L*W*H	mm	2500*1000*1400
Weight	kg	1320

Warranty

Cummin Engine

12 months from date of purchase or 1000 hours.

Generator

12 months from date of purchase or 1000 hours

(whichever comes first).