








H220

Technical data




 Max Lifting Capacity	 Engine Power	 Travel Speed	 Hydraulic Flow	 Max Lifting Height
1200 kg	36.5 kw	25 km/h	40 l/min	2.6 m




Technical data	H220	
Engine model	YANMAR 4TNV88-BIGE	Kubota V2403-M-DI-E3B-CSL1T
Fuel type	Diesel	
Cylinders	4	
Displacement cc	2190	2434
Emission standards	EU Stage V	China Off-Road GB4
Max engine output kW	18.5@1500rpm	36.5@2600 rpm
Max engine torque Nm	141@1500rpm	158.6@1600rpm
Cooling system	Water	
Operating voltage V	12	
Battery Ah	70	
Operating weight kg	2600	
Tipping load ,max kg	1500	
Lifting capacity,max kg	1200	
Operator's cab	Cabin	
Travel speed km/h	0~25	
Steering angle °	45	
Turn radius inside/outside mm	1410/3025	
Standard tires	10.0/75-15.3	
Fuel tank capacity l	50	
Hydraulic oil tank capacity l	50	
Working hydraulic flow(option) l/ min	40	
Working hydraulic pressure bar	200	
Transmission type	Hydrostatic	

H220 Dimensions/mm

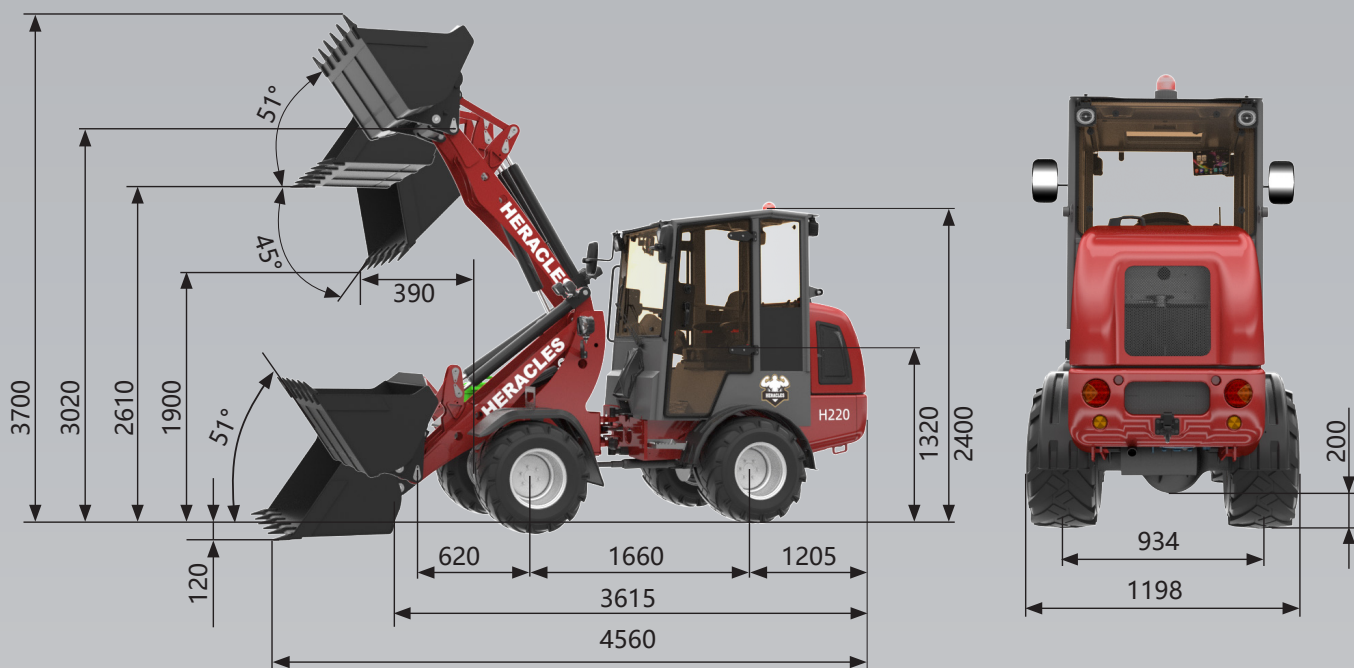

Tires size	Height	Width
10.0/75-15.3	2395	1198
31/15.5-15	2400	1450

- S 2200 kg
- T 1620 kg
- U 1200 kg
- V 900 kg
- W 2650 kg
- X 1700 kg
- Y 1250 kg

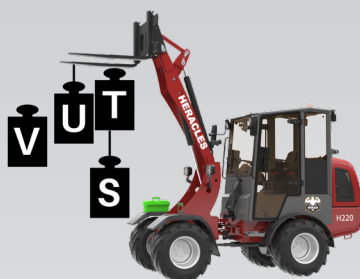

Products will continue to be optimized, so the technical data on this page may not be updated in real time.
For more information at: www.heracles.eu
Or contact us (contact information is on the back cover).