

HZM2812T TELESCOPIC LOADER QUOTATIONS SHEET

PLACE OF DELIVERY:	Qingdao Port
WARRANTY:	1 Year (since the date that buyer receive the machine)
TERMS OF PAYMENT:	25% paid by T/T as deposit and the rest against copy of B/L and loading pictures.

MODEL	DESCRIPTION	(FOB QINGDAO)	QTY	AMOUNT
HZM4512	JOYSTICK QUICK HITCH TELESCOPIC ARM PERKINS 403J-11T EU5 ENGINE FOUR HYDRAULIC LINE ROSP&FOPS ROOF LED LIGHTS VARTA BATTERY TRAILER BALL 10.0/75-15.3TIRES FLOATING FUNCTION VACUUM BOOSTER BRAKE 220V WATER HEATER GERMANY AXLE ADJUSTABLE SEAT NEW STEERING WHEEL GERMANY HYDROSTATIC TRANMISSION SYSTEM DIFFERENTIAL SYSTEM		1	




PICTURE



HZM2812T TELESCOPIC LOADER SPECIFICATIONS

Specification	Overall weight(kg)	2750
	L×W×H (mm)	3944 x 1564 x 1995
	Rated bucket capacity(m3)	0.4-0.6
	Rated load(kg)	1250
	Max.Dump height (mm)	3630
	Second dump height(mm)	2415
	Dump distance(mm)	557
	Lift height(mm)	4163
	Second lift height(mm)	2949
	Wheel base(mm)	1922
	Track width(mm)	1235
	Ground clearance(mm)	294
	Radius at the outer edge(mm)	2695
	Inside turning radius(mm)	951
	Rollback angle at max. lifting height(°)	52
	Dumping angle (max.)(°)	31
	Rollback angle (on the ground)(°)	44
	Driving Speed	0-20km/h
Engine	Model	PERKINS 403J-11T
	Type	Direct injection, Horizontal, Water-cooled, Three stroke
	Rated power (KW)	18.4
	Rated speed(r/min)	2800
	Emissions standard level	V
Control system	Static hydraulic system	
Drive Axle	Motor drive Axle	
Steering system	Max. turning angle	42°
	Min turning radius(mm)	2750mm
Tires	Standard tires	10.0/75-15.3

DRAFT

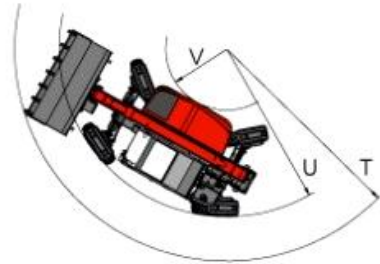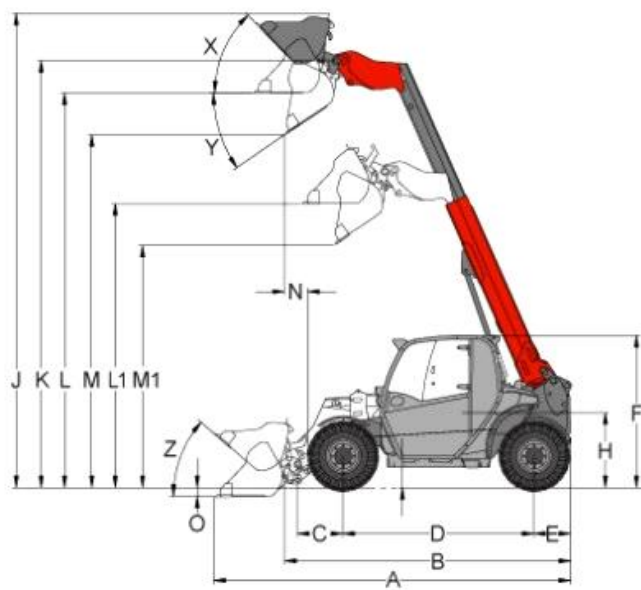

A	Total length	3,944 mm
B	Total length (without bucket)	2,991 mm
C	Axle middle to bucket pivot pin	450 mm
D	Wheelbase	1,922 mm
E	Rear overhang	427 mm
F	Height to top of cabin	1,995 mm
H	Seat top height	978 mm
J	Total working height	5,280 mm
K	Height of bucket pivot (max.)	4,537 mm
L1	Load-over height Retracted telescopic arm	2,949 mm
L	Load-over height Extended telescopic arm	4,163 mm
M1	Dumping height Retracted telescopic arm	2,415 mm
M	Dumping height Extended telescopic arm	3,630 mm
N	Operating distance for M	557 mm
O	Digging depth	91 mm
P	Total width	1,564 mm
Q	Track width	1,235 mm

S	Ground clearance	294 mm
T	Maximum radius external	3,506 mm
U	Radius at the outer edge	2,695 mm
V	Inside turning radius	951 mm
X	Rollback angle at max. lifting height	52 °
Y	Dumping angle (max.)	31 °
Z	Rollback angle (on the ground)	44 °

HZM2812T DIFFERENT FUNCTIONS AND SAFETY SYSTEMS:



THREE WAY MOVE TYPE ,CAN LET YOU HAEV MORE CHOICE TO FACE DIFFERENT WORK SITUATIONS,MORE EASY WORK ;

CYLINDERS WITH BALANCE VALVE , STOP ARM DOWN BY ITSELF OR MACHINE MOVE BY CYLINDERS BACK OIL ;

LEFT 15 SECONDS FROM SEAT ,MACHINES WILL LOCK AUTOMATIC ;

AUTOMATIC PARKING SYSTEM ;

WHOLE CAR SENSOR,MORE SENSITIVE AND FLEXIBLE ;

FULL AUTOMATIC ELECTRIC MAIN VALVE ;

INTEGRATED HANDLE CONTROL,ONE HANDLE CONTROL ALL MOVEMENTS ;

CHANGE ANY PARTS , ONE BUTTON RESTORE SYSTEM;

OVER LOAD WARNING SYSTEM ,ALSO CAN SET BY CUSTOMERS REQUESTS LOAD WEIGHT REQUESTS ;

HZM2812T DETAILS SHOW :



HZM2812T DETAILS SHOW :

